


# UBIIK MIMOMAX TORNADO

## 400MHz Radio Spec Sheet

---

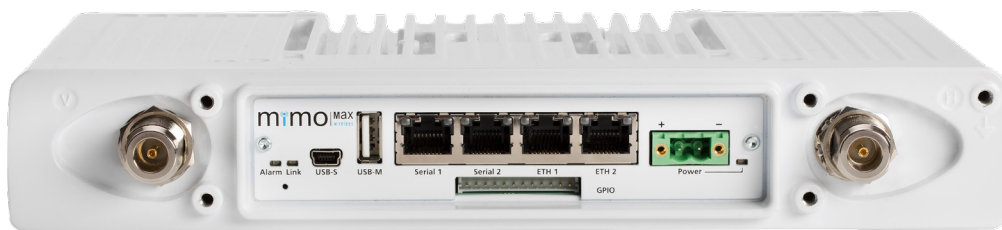

The Ubiik Mimomax Tornado is a full-duplex, software flexible, ultra spectrally efficient, long range point-to-multipoint remote radio unit with built-in intelligent network features for Critical Network Infrastructure. With scalable data rates and an efficient random access protocol, it can provide near real-time access to a large number of remote sites with very high reliability and low latency. The Ubiik Mimomax Tornado is fully compatible with all Ubiik Mimomax products and provides economical SCADA and Telemetry solutions to remote sites in the Power, Gas and Water acquisition and distribution industries.

### KEY FEATURES

- ▶ *Point-to-Point, Point-to-Multipoint*
- ▶ *Linux Applications Engine*
- ▶ *Ultra Spectrally Efficient*
- ▶ *Scalable Data Throughput Rates*
- ▶ *SCADA, Telemetry & Data Solutions*
- ▶ *Software Flexible & Intelligent*
- ▶ *Very Low Latency*
- ▶ *Very Low Power Consumption*
- ▶ *Full-duplex*
- ▶ *Capacity to Simultaneously Operate in Poll and Interrupt Modes*
- ▶ *UHF Licensed Spectrum*
- ▶ *Ethernet, Serial & USB Interface*
- ▶ *IP Data Encryption & Firewall Security*
- ▶ *Advance Software Features*
- ▶ *User Settable Frequency*
- ▶ *User Programmable Power*
- ▶ *Indoor & Outdoor Mountable*

# 400MHz UBIK MIMOMAX TORNADO SPECIFICATIONS

General		
Gross Data Rates	50 kHz	160/320/480/640kb/s <i>Uplink and/or downlink</i> 320/640/960/1280kb/s <i>Full-duplex</i>
	25 kHz	80/160/240/320kb/s <i>Uplink and/or downlink</i> 160/320/480/640kb/s <i>Full-duplex</i>
	12.5 kHz	40/80/120/160kb/s <i>Uplink and/or downlink</i> 80/160/240/320kb/s <i>Full-duplex</i>
Configuration		2 x 2 Full Duplex MIMO
Supply Voltage		10.5v DC to 60V DC
Maximum Power Consumption		26W (at 13.8V) 20W typical
Standby Power Consumption		<6W typical
Ambient Temperature Range		-30°C (-40°C) <sup>(1)</sup> to +60°C (+70°C) <sup>(2)</sup>
Mounting	1U High Rack Mount	
	Pole Mount	
	Wall Mount	
	DIN Rail Mount	
Dimensions (L x W x H)		180 x 270 x 44mm
Receiver		
Modulation		QPSK/16/64/256QAM
Number of MIMO receivers		2
Symbol Rate	2x40k symbols/sec (50 kHz)	
	2x20k symbols/sec (25kHz)	
	2x10k symbols/sec (12.5kHz)	
Modulation <sup>(3)</sup> Sensitivity <sup>(4)</sup> for 10 <sup>-4</sup> BER	50 kHz	<-109.5/-103/-97/-91dBm
	25 kHz	<-112.5/-106/-100/-93.5dBm
	12.5 kHz	<-115.5/-109/-104/-96dBm
Modulation <sup>(3)</sup> Sensitivity <sup>(4)</sup> for 10 <sup>-6</sup> BER	50 kHz	<-108.5/-102/-96/-89.5dBm
	25 kHz	<-111.5/-105/-99/-92dBm
	12.5 kHz	<-114.5/-108/-102/-94.5dBm
<i>Measurements via duplexer at antenna port</i>		
Frequency Range		400 to 470 MHz other frequencies available on request
Frequency Step Size		5 kHz & 6.25 kHz selectable
Frequency Accuracy and Stability		better than +/- 1ppm
Nominal Channel Bandwidth		12.5 kHz, 25 kHz, 50kHz
Transmitter		
Number of MIMO transmitters		2
Modulation		QPSK/16/64/256QAM
Symbol Rate	2x40k symbols/sec (50 kHz)	
	2x20k symbols/sec (25kHz)	
	2x10k symbols/sec (12.5kHz)	
RF Power Output <sup>(5)</sup>		Avg. before duplexer 2 x 27dBm Avg. after duplexer 2 x 24dBm Peak before duplexer 2 x 35dBm
RF Power Control Range		>20 dB
Frequency Range		400 to 470 MHz
Frequency Step Size		5 kHz & 6.25 kHz selectable

Duplexer (Internal)	
Type	Bandpass
Tx / Rx Split	5 MHz minimum
Frequency Range	400 to 470 MHz
Duplexer Sub Bands	400-430 MHz
	420-450 MHz
	440-470 MHz
Stop Band Attenuation	>60 dB @ >5 MHz from centre
Pass Band Bandwidth <sup>(6)</sup>	1 MHz

Duplexer (External)	
Type	Bandpass
Tx / Rx Split	4.5 MHz
Frequency Range	400 to 430 MHz, 440 - 470 MHz
Insertion Loss	<1.75 dB
Stop Band Attenuation	>70 dB
Pass Band Bandwidth <sup>(6)</sup>	2 MHz
Mounting	2U High Rack Mount

Interfaces (Digital & Analogue)	
ETHERNET	Dual 10BaseT/100BaseT
Connectors	2 x RJ45
ASYNCHRONOUS SERIAL	(Other data interfaces available via external media converters <sup>(7)</sup> )
Format	Dual RS232
Connectors	2 x RJ45
Baud Rate	300 - 115,200 baud
USB	High speed USB 2.0
Connectors	Type A and mini B
ALARM	1 set of volt-free change over contacts
GPIO <i>Analogue/Digital</i>	4 x s/w configurable I/O ports
FREQUENCY REFERENCE <i>Input/Output</i>	isolated differential pair

Compliances	
Radio Performance	AS/NZS 4768.3:2018 <sup>(8)</sup>
	FCC 47CFR part 90
	IC Canada <i>RSS-119</i>
	ETSI EN 302-561 V2.1.1 (2016-03) <sup>(8)</sup>
EMC	EN 301 489 <i>EN 301 489-1 V1.9.2 (2011-09)</i> <i>EN301 489-4 V2.1.1 (2012-11)</i> FCC 47CFR part 15
Environmental	60950-22 Outdoor Safety <sup>(9)</sup>
Safety	IEC 60950-1: 2005, Am 1 : 2009

**Important:** Specifications are subject to change without prior notice

(1) -40°C for continuous operation.

(2) +70°C for RRU-T with 25% duty cycle.

(3) Systems employing modulation swapping will automatically reduce the modulation order at a signal level higher than the specified sensitivity level.

(4) Sensitivity as specified includes forward error correction and internal duplexer loss.

(5) Tornado RF output remains constant at all modulations.

(6) The maximum acceptable frequency shift without retuning the duplexer is also subject to the stop band performance.

(7) Contact MiMoMax Wireless for more information

(8) Tested up to receiver modulation of 64 QAM and transmitter modulation of 256 QAM for 25kHz and 50kHz channel

(9) Designed to meet